




(4)- $\phi 1"$ ANCHOR HOLES

(4)- $\phi 5/8"$ x $1\frac{3}{4}"$ LG
S.S. HEX HEAD BOLTS

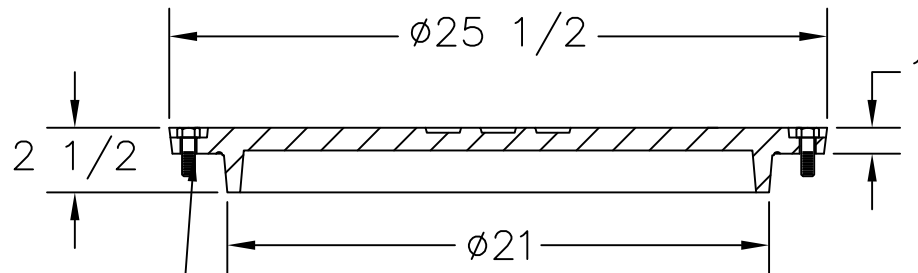

(2)-NON PENETRATING
PICKHOLES

MACHINED
SURFACE

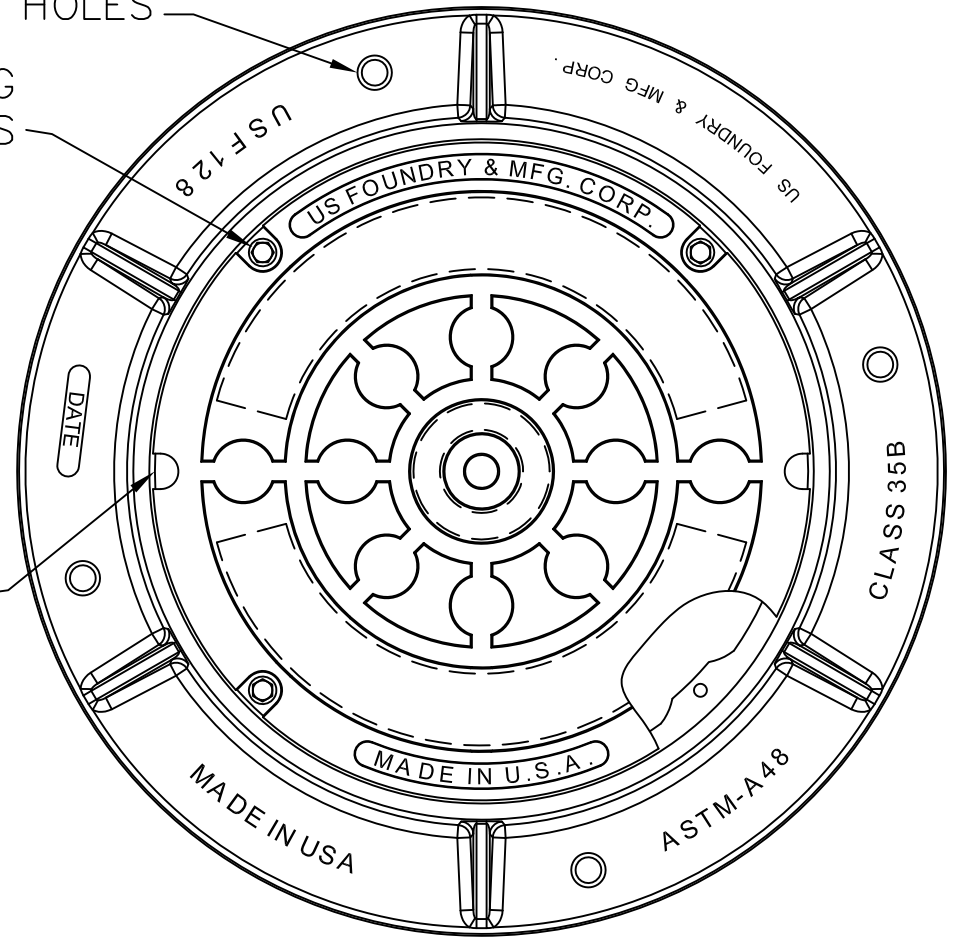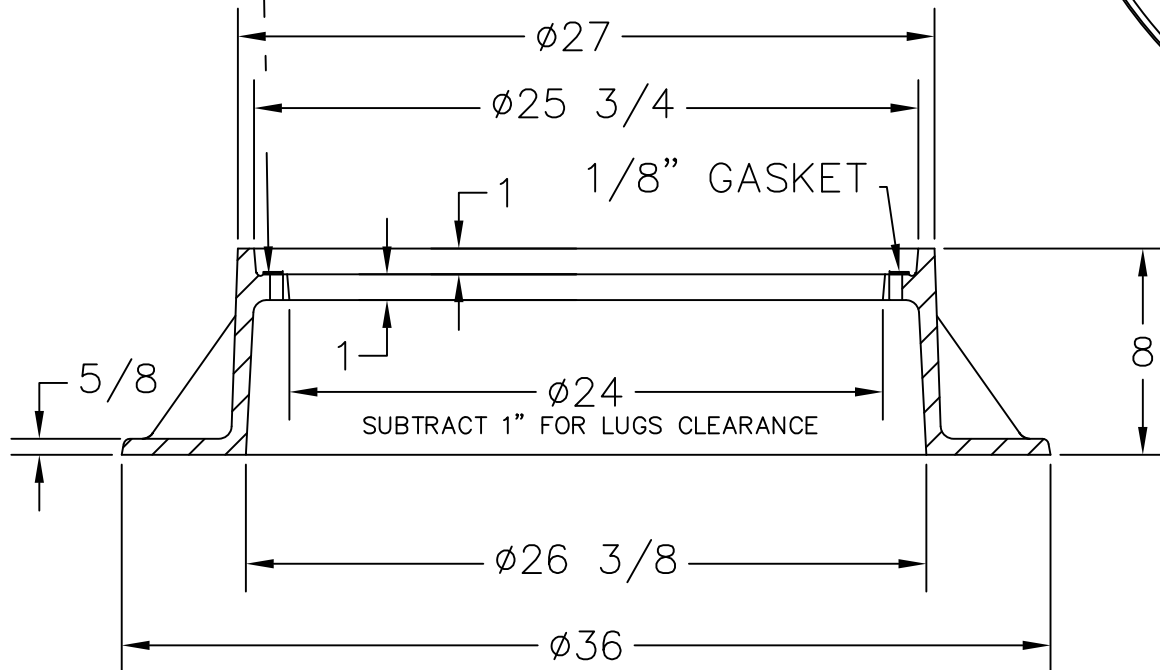

 US FOUNDRY & MFG. CORP. 8351 NW 93rd Street, Medley, FL 33166-2025 ph: 1-800-432-9709; fax: 305-887-9429 www.usfoundry.com © 2010 US Foundry & Mfg. Corp. All Rights Reserved			
USF 128 RING & IP COVER BWT			
LOAD CLASSIFICATION: Heavy Duty		CLASS 35B	
MATERIAL: ASTM-A48 GRAY IRON		SCALE: 1/8"=1"	
Ring No:	8021347	WGHT: 215	DATE:
Cover No:		125	OWN. BY: ULS
UNLESS OTHERWISE NOTED WEIGHT IS IN POUNDS AND APPROXIMATED			
REV:	DATE:	REV BY:	QUOTE#