


DRAWING CONTROL: CONTROLLED DRAWINGS ON NF CO SERVER. ALL OTHER COPIES, ELECTRONIC OR PRINTED ARE FOR REFERENCE ONLY

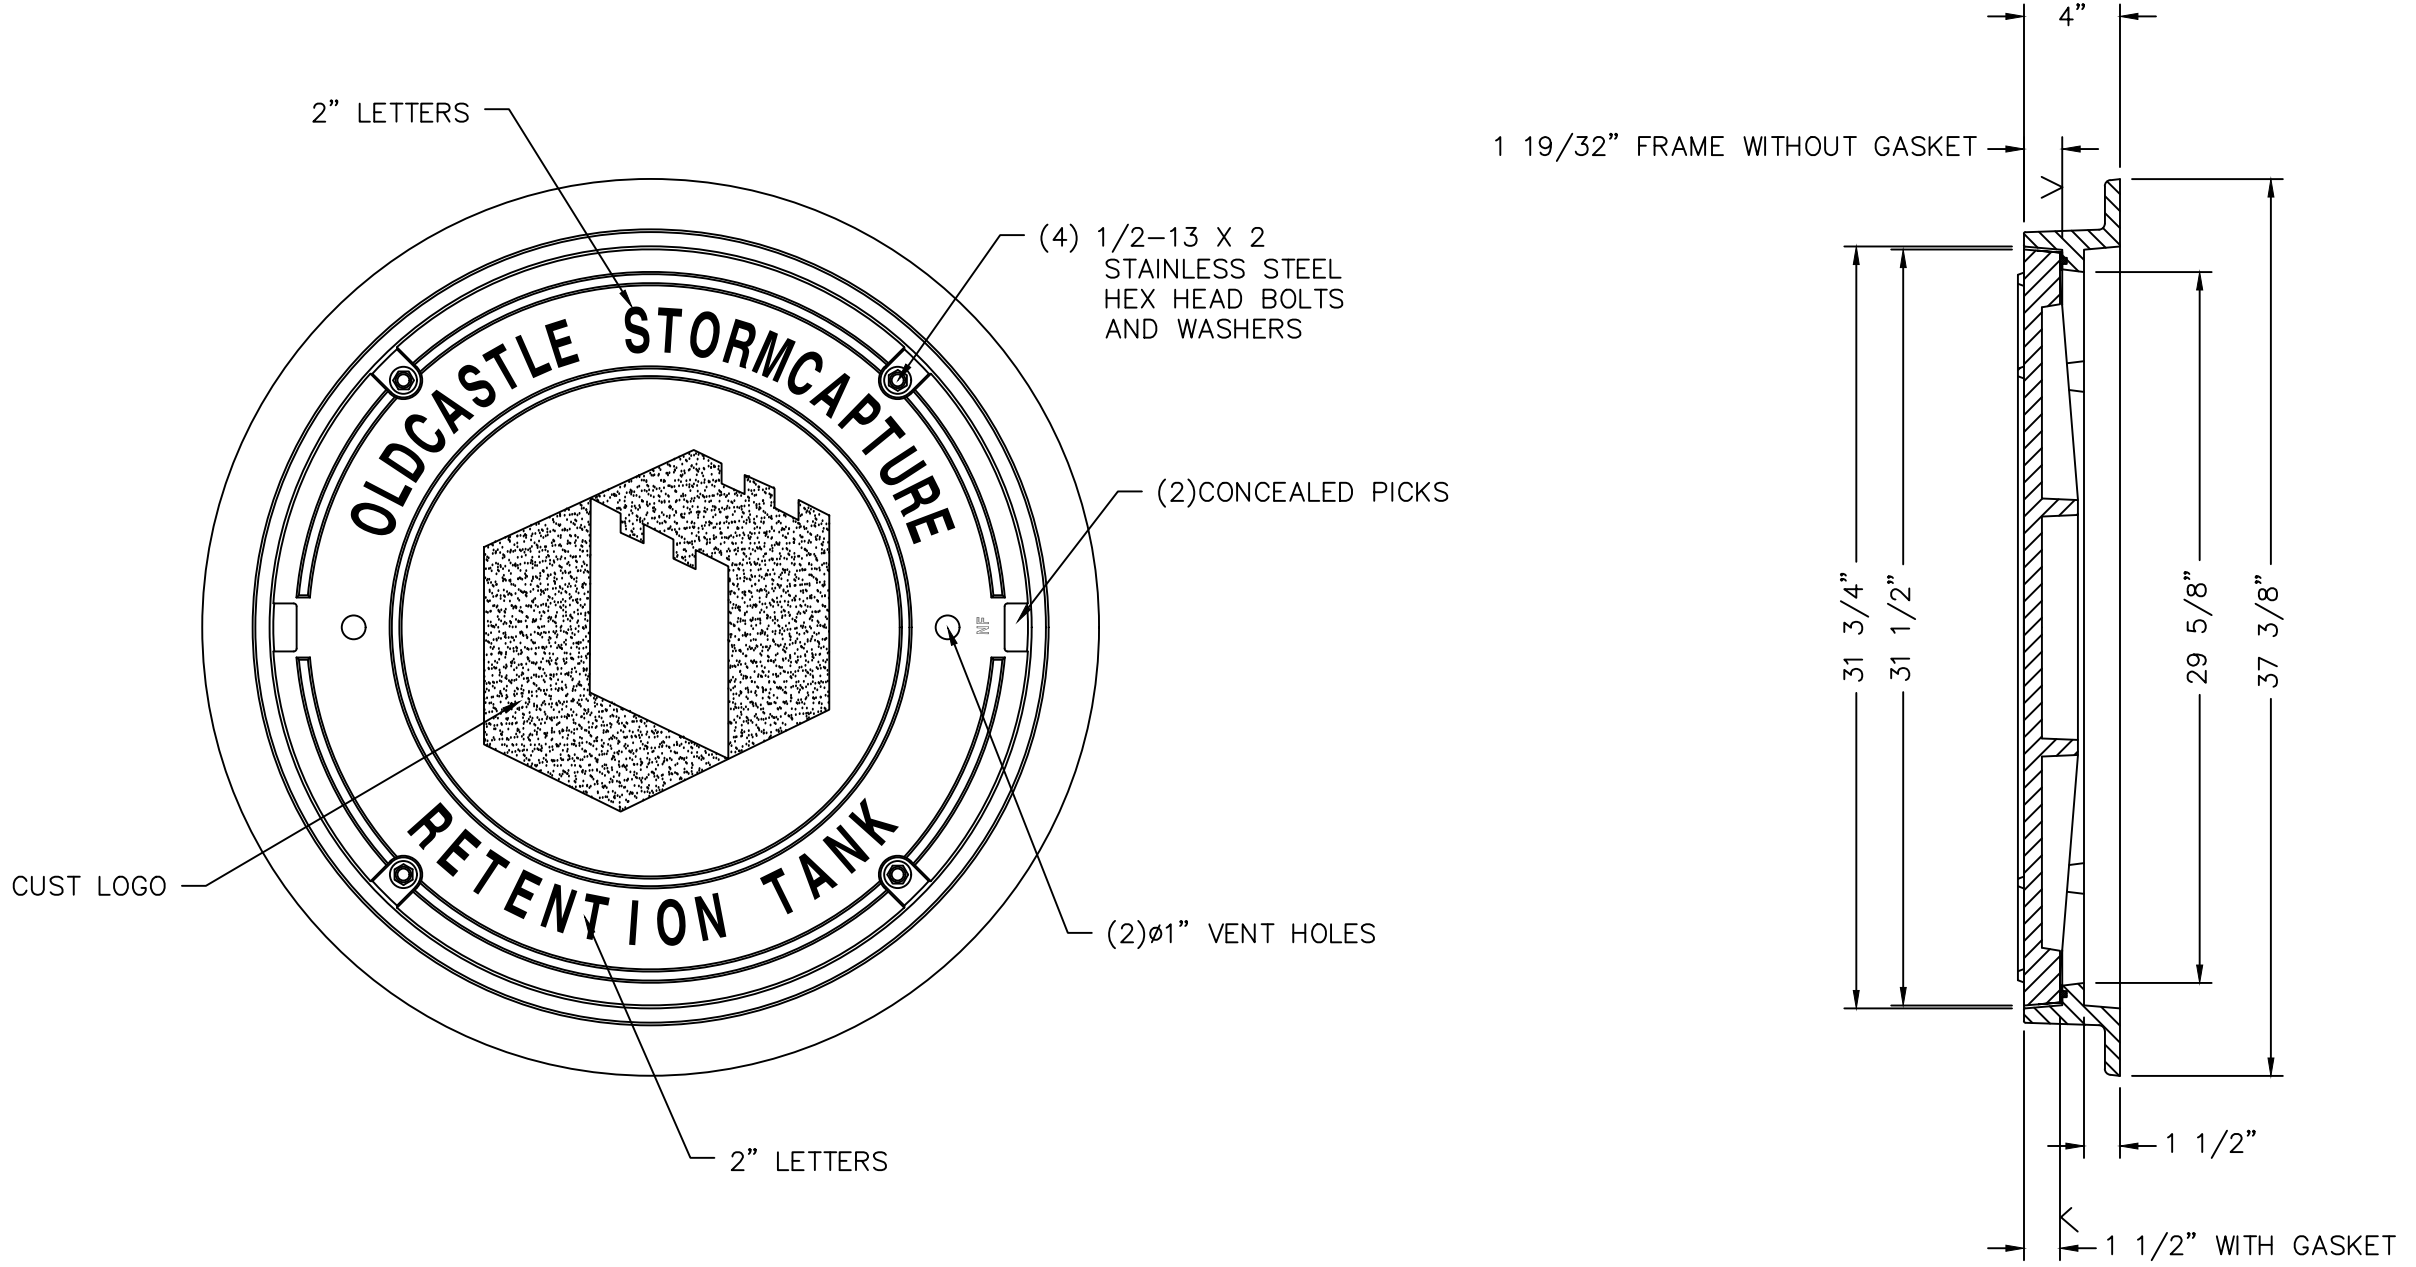

MANHOLE RING IS REVERSIBLE AND CAN BE INSTALLED WITH FLANGE UP OR DOWN. TO ORDER FRAME MACHINED FLANGE UP USE ORDER # 1296-RFU. TO ORDER FRAME MACHINED FLANGE DOWN USE ORDER # 1296-RFD.

FURNISHED WITH A T-GASKET IN FRAME.

NOTES:

- ALL DIMENSIONS SHOWN ARE IN ENGLISH
- LOAD RATING: SUITABLE FOR TRAFFIC (DOES NOT MEET H-20 / HS-20)
- COMPONENT NOS.: FRAME 1296-0513, LID 1296-51XX
- LID EQUIPMENT NOS.: D55550093, K55550094, THREE NEW INSERTS
- MATERIAL: CAST GRAY IRON ASTM A-48, CLASS 35B
- FINISH: NO PAINT
- WEIGHT: FRAME≈125#, LID≈210#

REV	DATE	DESCRIPTION	DR	CH	APP

DR.	HG	SCALE 1/8"=1"	TITLE: DF-1296-RFD BOLTED FRAME AND LID, W/T-GASKET	NF-1296-RT08	B
CH.	RON				
APP.	HSH	NEENAH FOUNDRY  NEENAH WISCONSIN 54956 PHONE 800-558-5075 LINCOLN, NEBRASKA 68529 PHONE 800-234-7466			
DATE	07-26-2021				
	www.nfco.com				