



(1) LIFTING SLOT
1 1/4" [32mm]
X 3/8" [10mm]

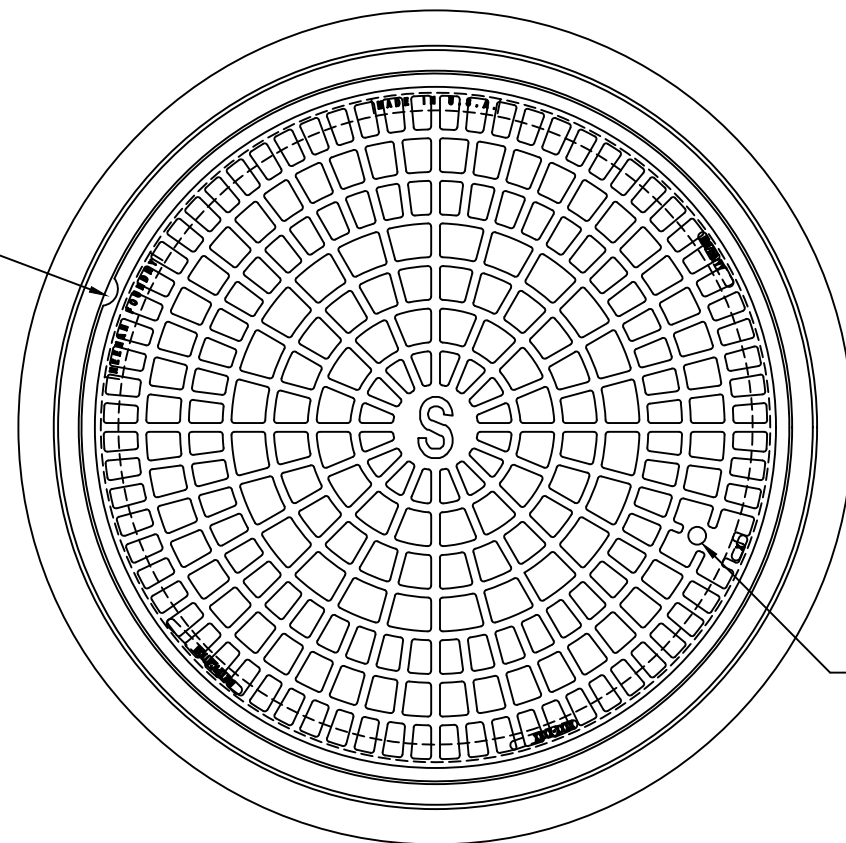

3/4" [19mm] DIA. LIFT HOLE
3" [76mm] FROM EDGE OF LID

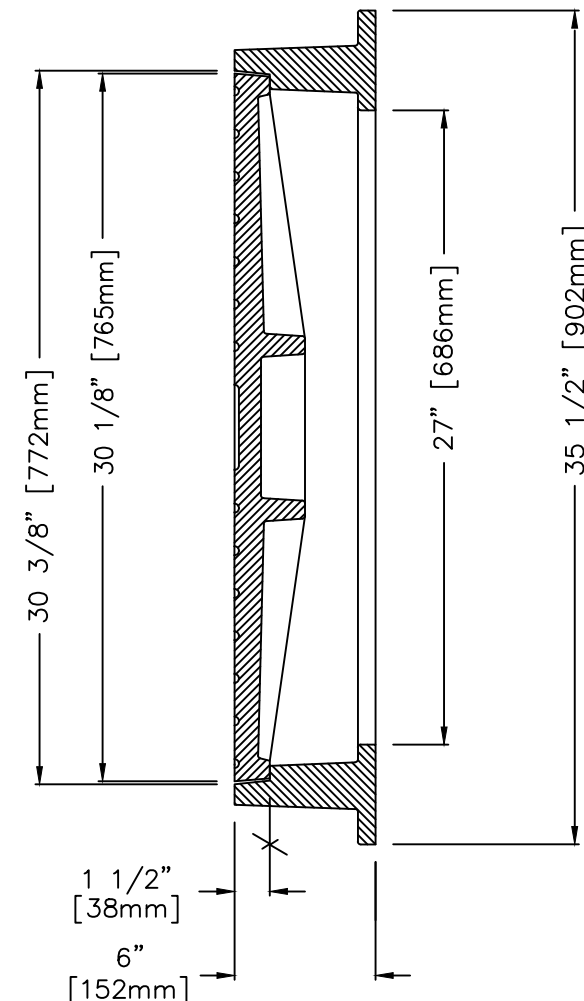

NOTES: MATERIAL - CAST GRAY IRON ASTM A-48 CLASS 35B
 FOUNDRY MARK SHALL BE SHOWN ON THE BOTTOM OF THE COVER
 FOUNDRY MARK SHALL BE SHOWN ON THE FRAME (INSIDE OR OUTSIDE)
 ALL DRAFT ANGLES TO BE 5°, UNLESS OTHERWISE SHOWN.
 COVERS SHALL BEAR THE LETTER "D" FOR STORM DRAINS
 AND 'S' FOR SEWERS. THE LETTERS SHALL BE APPROX. 2 1/2" HIGH
 WITH 1/2" LINE WIDTH AND PLACED IN THE CENTER OF THE COVER.
 COVERS SHALL ALSO BEAR THE AGENCY'S IDENTIFICATION IN
 ACCORDANCE w/ INSTRUCTIONS FURN. BY THE AGENCY.
 ALL LETTERS SHALL BE FLUSH WITH THE FINISHED SURFACE OF THE COVER.
 WEIGHT - FRAME 270#, LID 238#
 REF. APWA-SCC STANDARD PLAN 631-0
 COMPONENT NOS.: FRAME 1576-0039, LID 1576-0002

02-03-2015	FRAME WAS 1576-0001	RKB	SPT	SPT					
DATE	REVISION	DR	CH	APP					

DR. E. REMME	SCALE 1/8"=1"	TITLE: R-1576 FRAME AND LID LETTERED "S"		
CH.				
APP.	DIM CHK.			
DATE 12-04-96		NEENAH FOUNDRY COMPANY NEENAH WISCONSIN 54956	NEF	NF-1576 100 B