

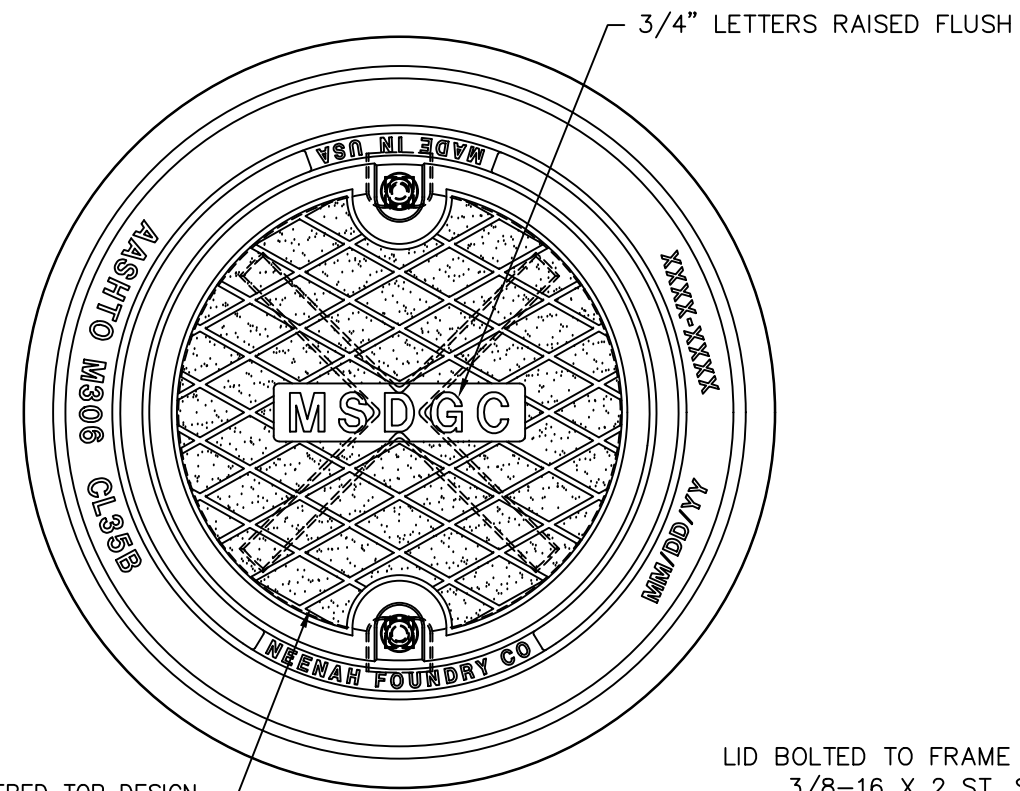


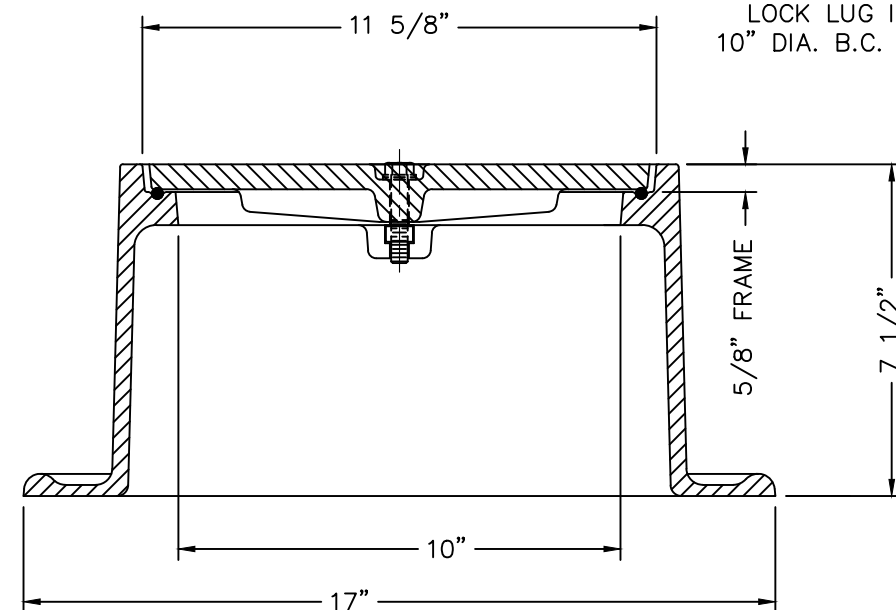

TYPE "C" CHECKERED TOP DESIGN
w/ PERMAGRIP SURFACE TEXTURE

LID BOLTED TO FRAME WITH (2)
3/8-16 X 2 ST. STL. HEX.
BOLT, ST. STL. AND NEOPRENE
NARROW WASHERS, WITH SQUARE
NUT INSERTED INTO THE T-SLOT
LOCK LUG IN FRAME SEAT ON
10" DIA. B.C. (CINCINNATI LOCK)

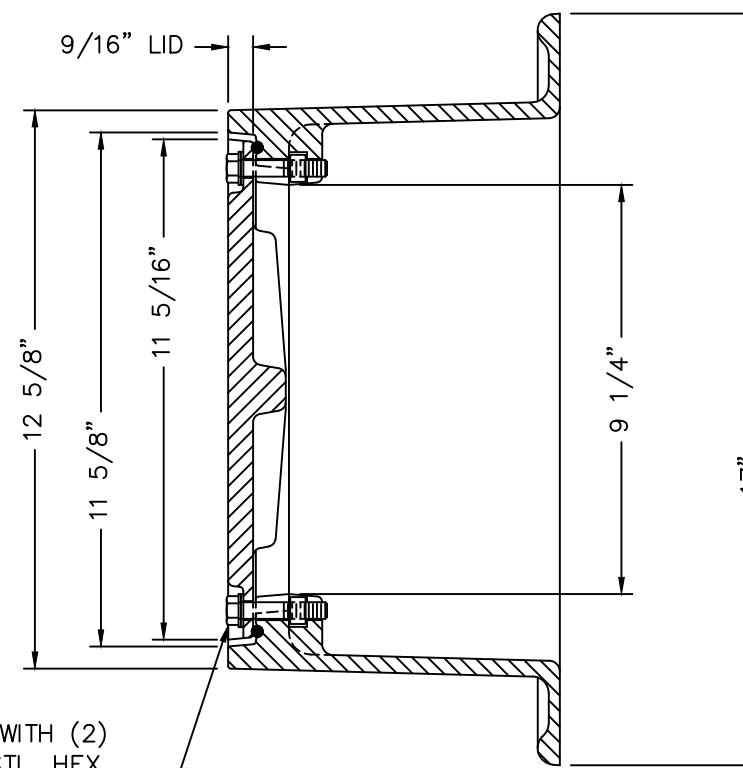

COMPONENT NOS.: FRAME 1969-2300, LID 1969-0002
MATERIAL: CAST GRAY IRON ASTM A-48, CLASS 35B
FINISH: NO PAINT
WEIGHT: FRAME 49#, LID 16#

DR. E. NIVER		SCALE 1/8"=1"	TITLE: R-1969 FRAME AND BOLTED LID LTRD. 'MSDGC'
CH. CAG			
APP. SPT		NEENAH FOUNDRY  NEENAH WISCONSIN 54956 PHONE 800-558-5075  LINCOLN, NEBRASKA 68529 PHONE 800-234-7466	NF-1969 105 B
DATE 02-17-2014			
www.neenahfoundry.com			

DATE	REVISION	DR	CH	APP
03-22-2015	CHANGE LENGTH OF BOLTS FROM 1 3/4"	ELN	RKB	SPT