



3 LIFTING HOLES AT
120° APART.

MACHINED SURFACE

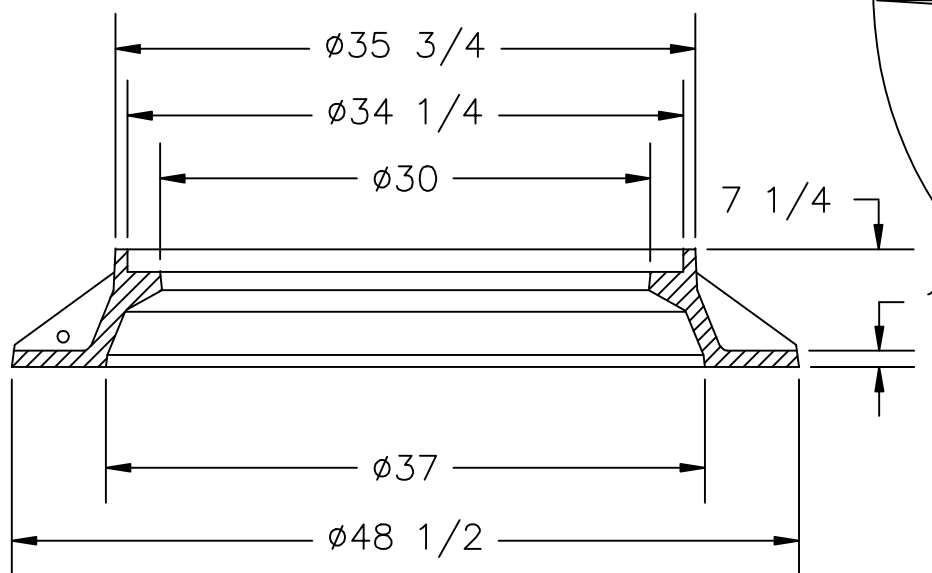

4 PENETRATING
PICKHOLES.

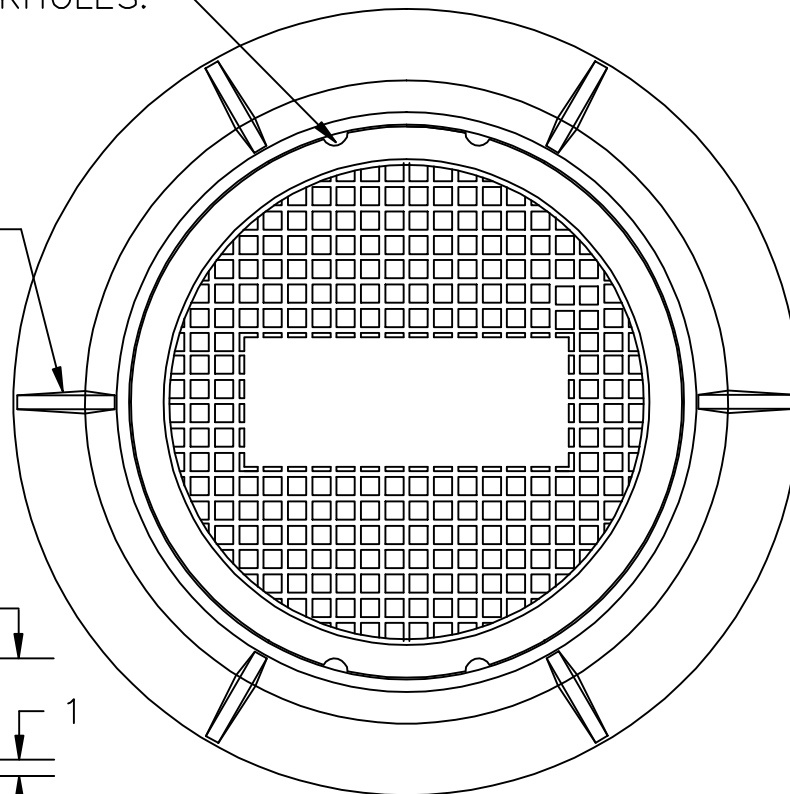

US FOUNDRY & MFG. CORP.

8351 NW 93rd Street, Medley, FL 33166-2025

ph: 1-800-432-9709; fax: 305-887-9429

www.usfoundry.com

© 2010 US Foundry & Mfg. Corp. All Rights Reserved

USF 642 Ring & AX Cover

LOAD CLASSIFICATION: Heavy Duty			
MATERIAL: ASTM-A48 GRAY IRON CLASS35B			
Ring No:	8020179	WGHT:	515
Cover No:			330
		SCALE:	1/8"=1"
		DATE:	12-22-05
		OWN. BY:	DBB/NR
UNLESS OTHERWISE NOTED WEIGHT IS IN POUNDS AND APPROXIMATED			
REV:	DATE:	REV BY:	QUOTE#