



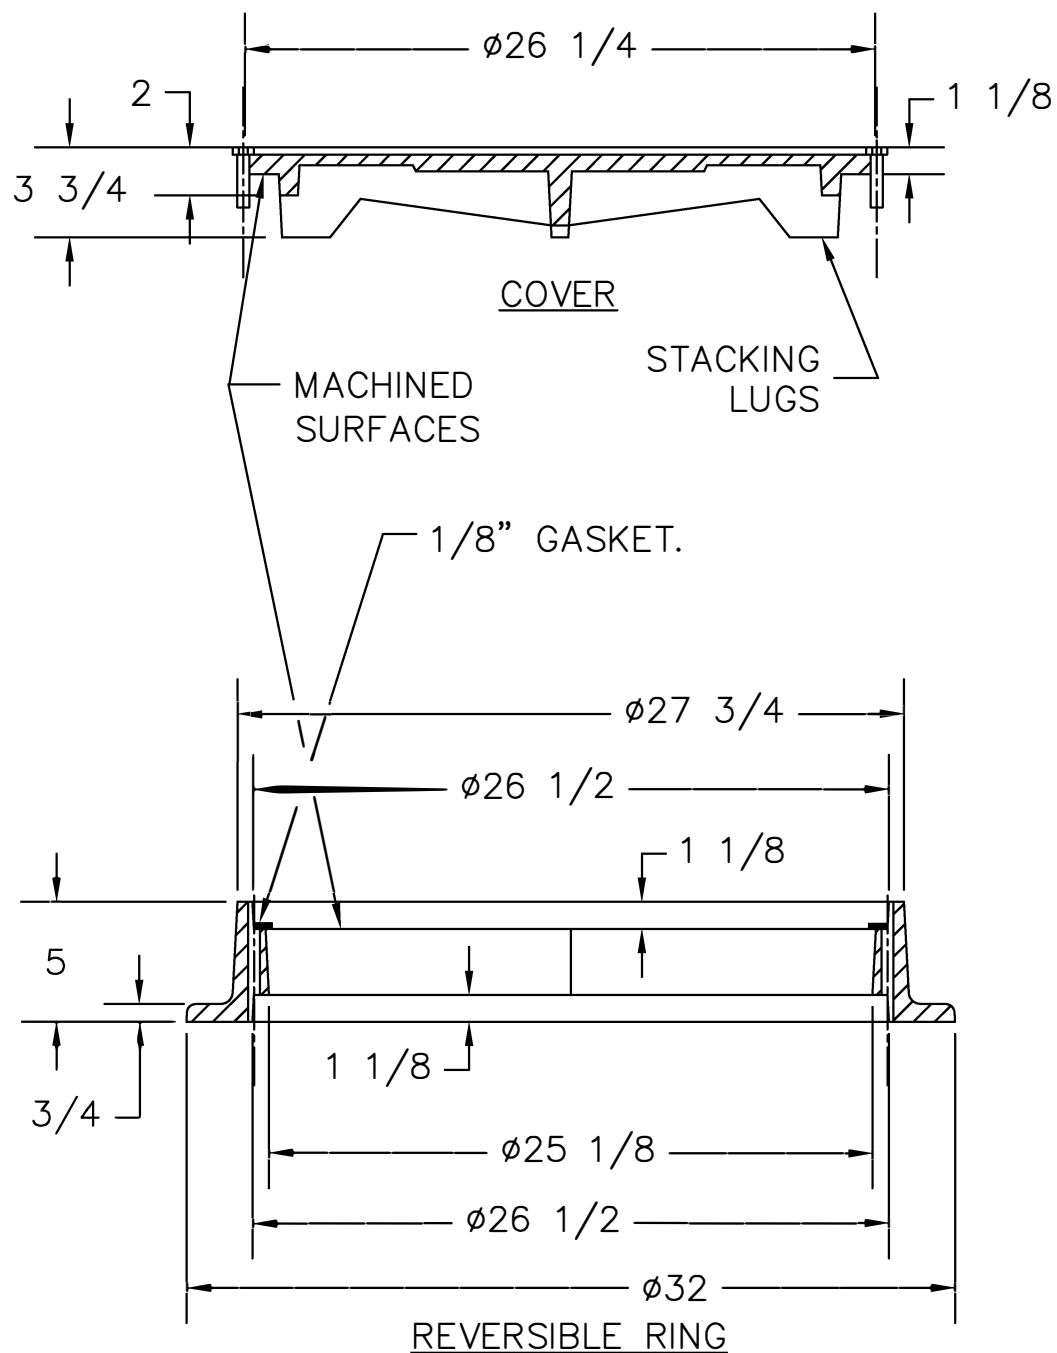

(2)– NON-PENETRATING PICKHOLES

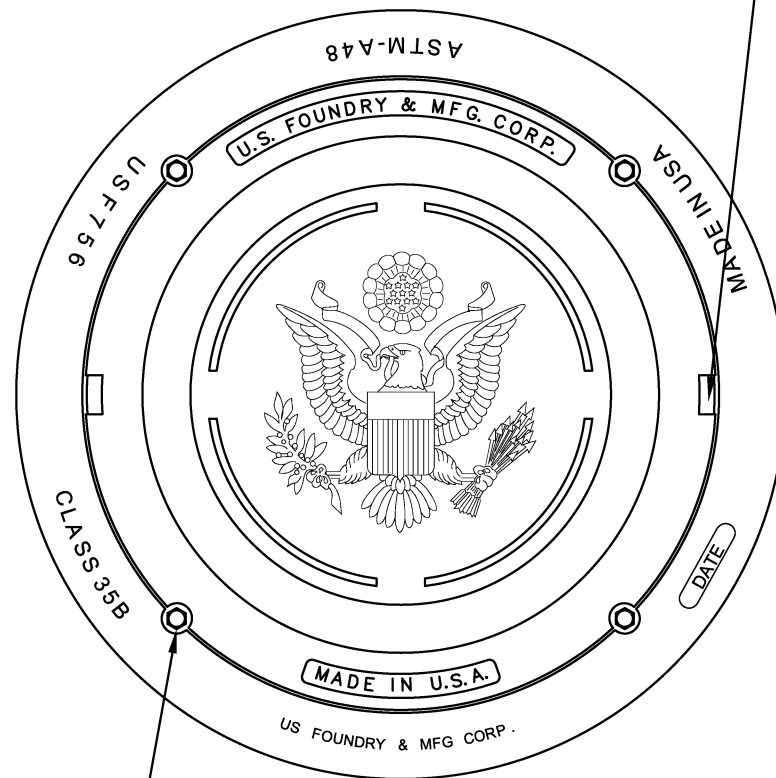

(4) $\phi 1/2$ " S.S.
BOLTS 90°APART.

 US FOUNDRY & MFG. CORP. 8351 NW 93rd Street, Medley, FL 33166-2025 ph: 1-800-432-9709; fax: 305-887-9429 www.usfoundry.com © 2010 US Foundry & Mfg. Corp. All Rights Reserved			
USF 756 RING & GI COVER (w/ BOLTING APPLICATION (DRILLED))			
LOAD CLASSIFICATION: Heavy Duty			
MATERIAL: ASTM-A48 GRAY IRON CLASS35B			
Ring No:	8020508	WGHT:	155
Cover No:		SCALE:	1/8"=1"
		DATE:	
		OWN. BY:	ULS
UNLESS OTHERWISE NOTED WEIGHT IS IN POUNDS AND APPROXIMATED			
REV:	DATE:	REV BY:	QUOTE#